


特征 Features

- 反向漏电流低 Low reverse leakage
- 正向浪涌承受能力强 High forward surge capability
- 高信赖性 High reliability
- 高温焊接保证 High temperature soldering guaranteed:
260°C/10 秒 260°C/10seconds
- 引线和管体皆符合RoHS标准
Lead and body according with RoHS standard

机械数据 Mechanical Data

- 封装外形:DO-214AB 塑封 Case:DO-214AB Molded plastic
- 环氧树脂:UL易燃等级:94V-0
Epoxy:UL 94V-0 rate flame retardant
- 引脚:镀锡,无铅 Lead: Pure tin plated, lead free
- 体系:通过IAFT-16949体系认证 System: Accreditation through IATF16949 System
- 高可靠性等级 (AEC Q101合格) High reliability grade (AEC Q101 qualified)

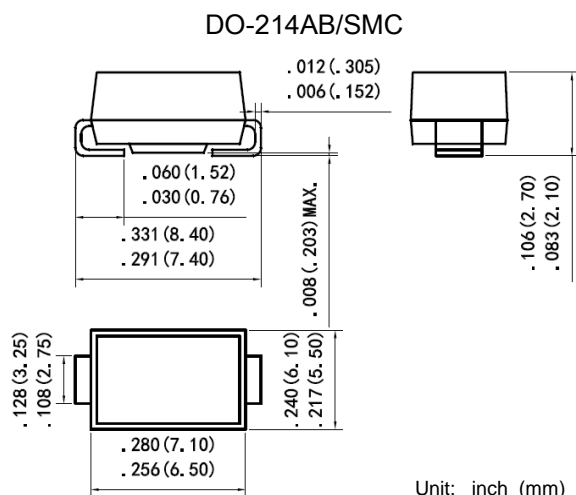

最大值和特性 TA = 25°C 除非另有规定。

Maximum Ratings & Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.


| 参数 Parameter | 符号 Symbols | S-S8A | S-S8B | S-S8D | S-S8G | S-S8J | S-S8K | S-S8M | 单位 Unit |
|--|------------------------------------|--------------|-------|-------|-------|-------|-------|-------|--------------------|
| 最大可重复峰值反向电压 Maximum repetitive peak reverse voltage | V_{RRM} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| 最大均方根电压 Maximum RMS voltage | V_{RMS} | 35 | 70 | 140 | 280 | 420 | 560 | 700 | V |
| 最大直流阻断电压 Maximum DC blocking voltage | V_{DC} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| 最大正向平均整流电流 Maximum average forward rectified current | $I_{F(AV)}$ | 8.0 | | | | | | | A |
| 正向不重复浪涌电流 8.3 ms单一正弦半波 Non-repetitive peak forward surge current 8.3 ms singlehalf sine-wave | I_{FSM} | 200 | | | | | | | A |
| 熔断系数 $t \leq 10$ ms Current squared time $t \leq 10$ ms | I^2t | 166 | | | | | | | A ² S |
| 最大正向电压 @IF=8.0A Maximum forward voltage | V_F | 1.1 | | | | | | | V |
| 最大反向电流 @V _{DC} Maximum reverse current | I_R | 10 | | | | | | | μ A |
| $T_A = 25^\circ\text{C}$ | | 250 | | | | | | | |
| 典型热阻 结到管脚 Typical thermal resistance (Note 1) | $R_{\theta JT}$ $R_{\theta JA}$ | 10 47 | | | | | | | $^\circ\text{C/W}$ |
| 典型结电容 VR=4.0V,f=1MHz Type junction capacitance | C_J | 40 | | | | | | | pF |
| 工作结温和存储温度 Operating junction and storage temperature rang | T_J, T_{STG} | -65 --- +150 | | | | | | | $^\circ\text{C}$ |

备注 Note:


- 1) 安装在PCB板上,从PN结到周围环境的热阻。
1) Thermal resistance from junction to ambient, PCB mounted.

特性曲线 Characteristic Curves


正向特性曲线 (典型值)
TYPICAL FORWARD CHARACTERISTIC

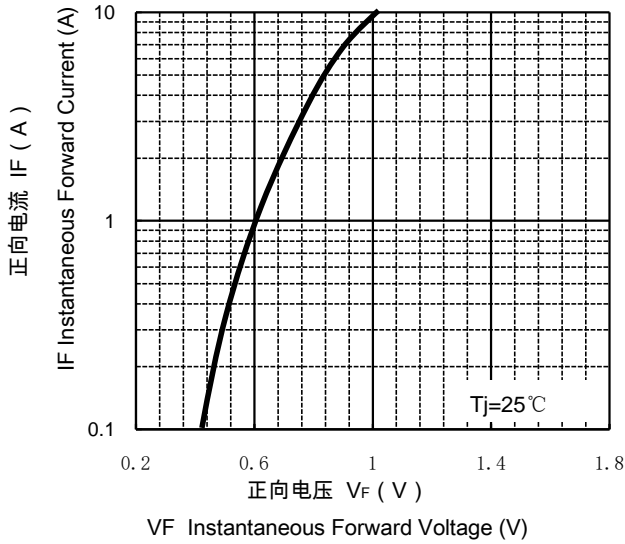


正向电流降额曲线
FORWARD CURRENT DERATING CURVE

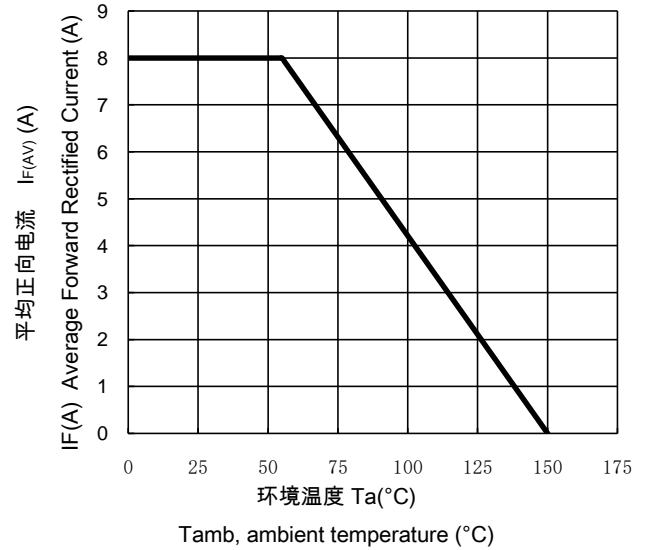

浪涌特性曲线 (最大值)
MAXIMUM NON REPETITIVE
PEAK FORWARD SURGE CURRENT

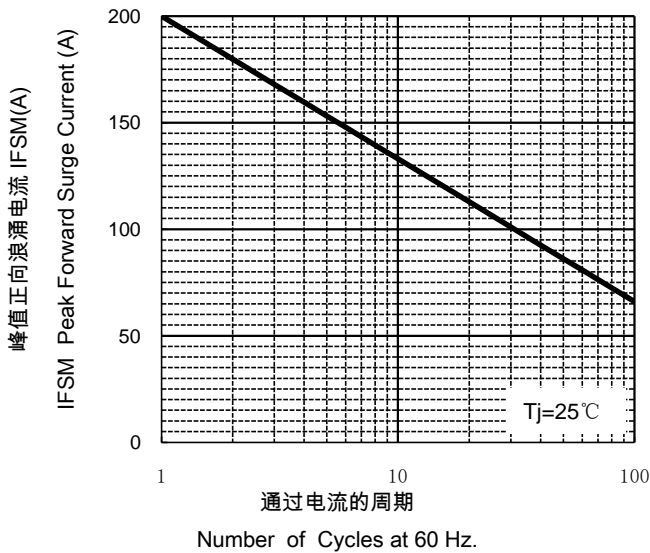

反向特性曲线
Typical Reverse Characteristics

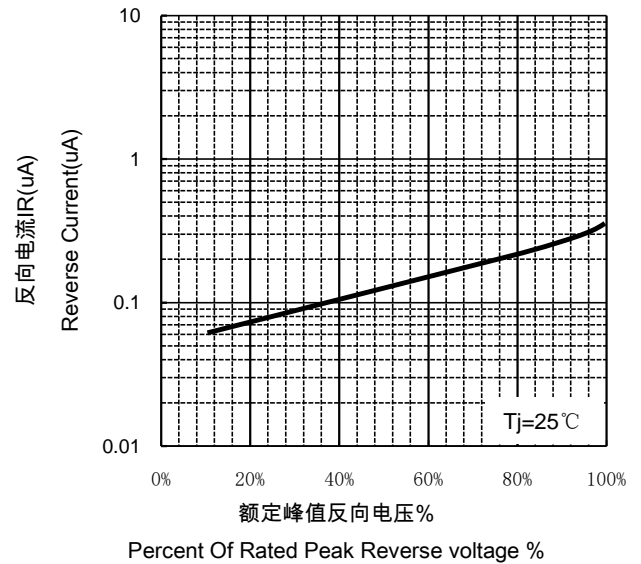

NOTICE

Leiditech reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Leiditech does not assume any liability arising out of the application or use of any product described herein.