


### Features

- Ultra low capacitance: 0.26pF
- typical Ultra low leakage: nA level
- Low operating voltage: 3.3V
- Low clamping voltage
- 2-pin leadless package
- Complies with following standards:
  - IEC 61000-4-2 (ESD) immunity test
    - Air discharge:  $\pm 20\text{kV}$
    - Contact discharge:  $\pm 15\text{kV}$
  - IEC61000-4-5 (Lightning) 6A (8/20 $\mu\text{s}$ )
- RoHS Compliant
- Lead Finish: NiPdAu


### Applications

- USB Ports
- SIM Ports
- Smart Phones
- Wireless Systems
- Set-top box and digital TV
- Digital video interface (DVI)
- Ethernet 10/100 Base T

### Dimensions DFN0603

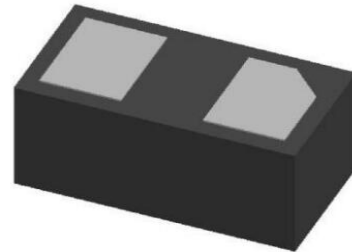

### Pin Configuration

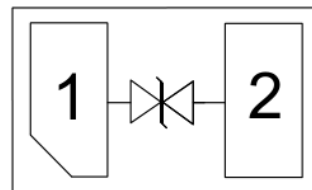

### Mechanical Characteristics

- Package: DFN0603
- Lead Finish: Lead Free
- UL Flammability Classification Rating 94V-0
- Quantity Per Reel: 10,000pcs
- Reel Size: 7 inch
- Device Marking: C9


### Absolute Maximum Ratings (T<sub>amb</sub>=25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Pulse Power (8/20 $\mu\text{s}$ )	P <sub>pp</sub>	40	W
ESD per IEC 61000-4-2 (Air)	V <sub>ESD</sub>	$\pm 20$	kV
ESD per IEC 61000-4-2 (Contact)		$\pm 15$	
Operating Temperature Range	T <sub>J</sub>	-55 to +125	°C
Storage Temperature Range	T <sub>STJ</sub>	-55 to +125	°C

**Electrical Characteristics**( $T_A=25^{\circ}\text{C}$  unless otherwise specified)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Reverse Working Voltage	$V_{RWM}$				3.3	V
Breakdown Voltage	$V_{BR}$	$I_T = 1\text{mA}$	4	7.8		V
Reverse Leakage Current	$I_R$	$V_{RWM} = 3.3\text{V}$			0.05	$\mu\text{A}$
Clamping Voltage	$V_C$	$I_{PP} = 6\text{A}$ (8 x 20 $\mu\text{s}$ pulse)		5.5	6.5	V
ESD Clamping Voltage	$V_C$	$I_{TLP}=4\text{A}, t_p=0.2/100\text{ns}$		5.8		V
ESD Clamping Voltage	$V_C$	$I_{TLP}=16\text{A}, t_p=0.2/100\text{ns}$		9.4	11.8	V
Junction Capacitance	$C_J$	$V_R = 0\text{V}, f = 1\text{MHz}$		0.26	0.32	pF


**Electrical Parameters**( $T_A=25^{\circ}\text{C}$  unless otherwise specified)

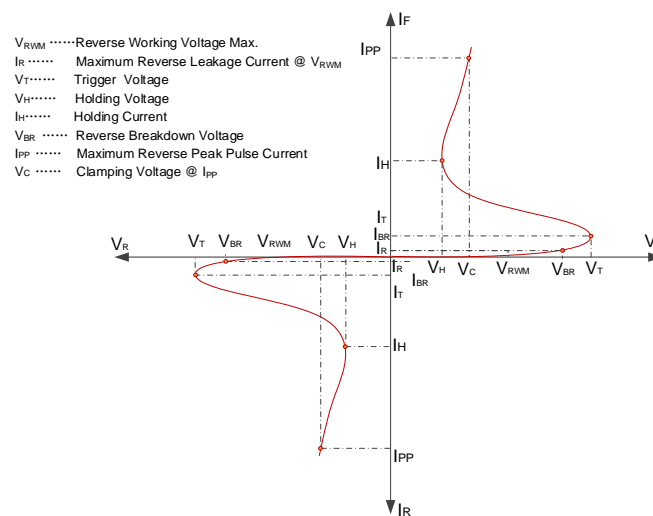


Note1: 8/20 $\mu\text{s}$  pulse waveform.

## Typical Performance Characteristics (TA=25°C unless otherwise specified)


Capacitance vs. Reverse Voltage

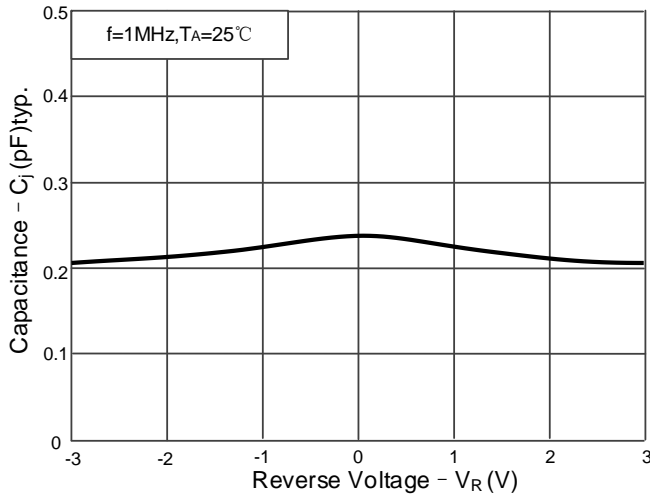


Reverse Clamping Voltage vs. Peak Pulse Current

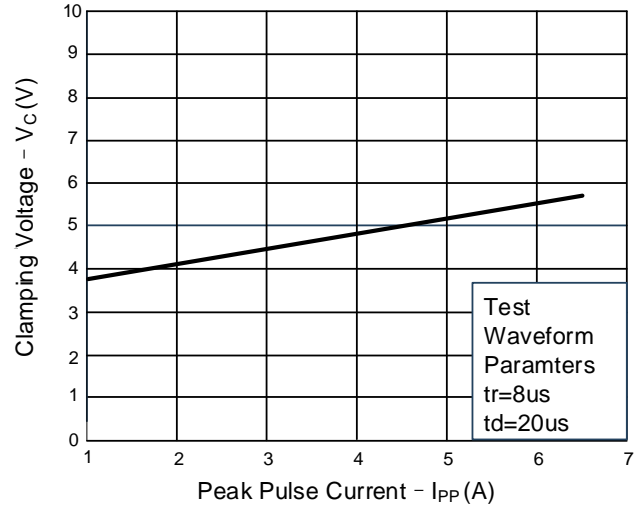


TLP Positive I-V Curve

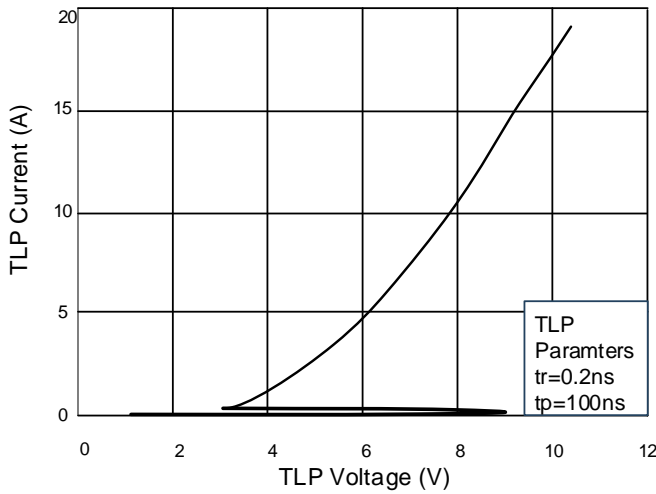


TLP Negative I-V Curve

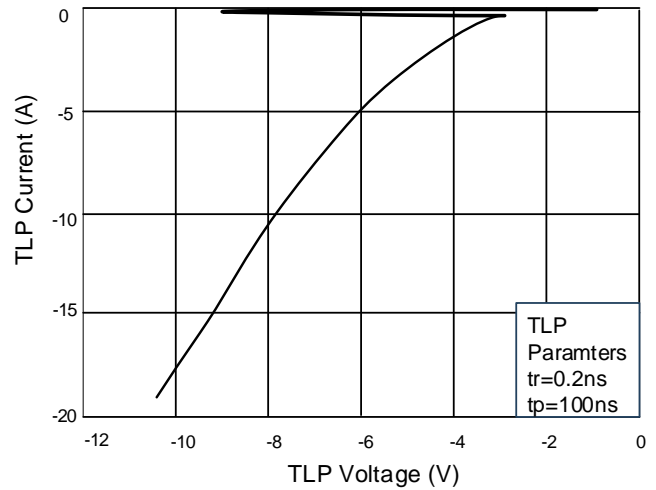


IEC61000-4-2 : 8 kV positive pulse(pin 1 to pin 2)

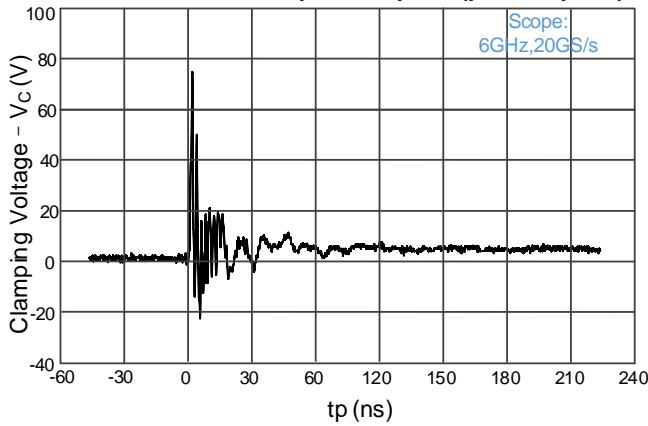


IEC61000-4-2 : 8 Kv negative pulse(pin 2 to pin 1)

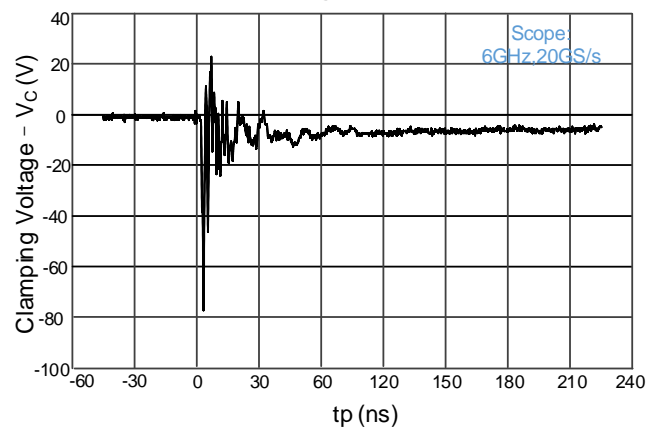

## DFN0603 Package Outline Drawing

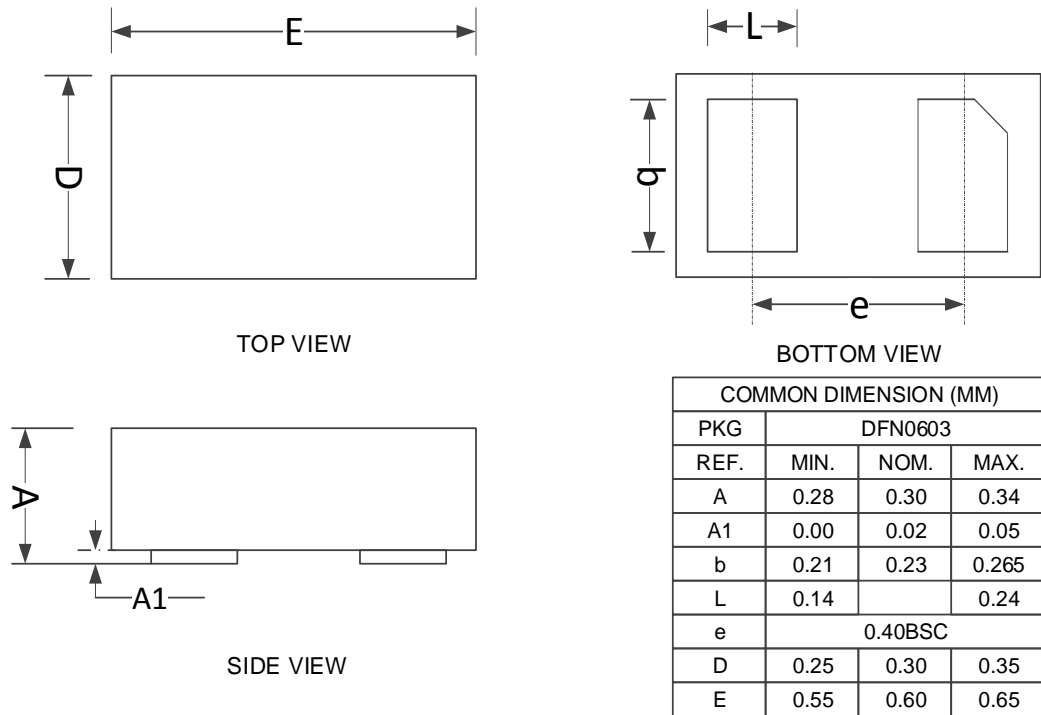

## Suggested Land Pattern

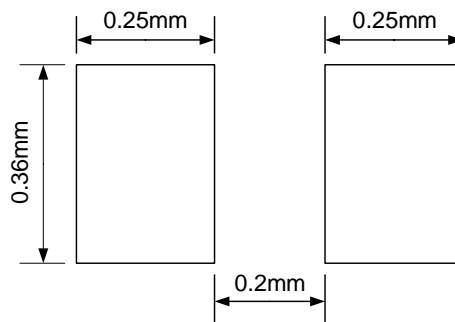

Notes: This PCB Layout Is For Reference Purposes Only.

### NOTICE

Leiditech reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Leiditech does not assume any liability arising out of the application or use of any product described herein.