

# SMD5050-090 series

## Surface Mount 2-Electrode gas Discharge Tube

#### **Description**

Gas discharge Tubes (GDT) are classical components for protecting the installations of the telecommunications. It is essential that IT and telecommunications systems -with their high-grade but sensitive electronic circuits - be protected by arresters. They are thus fitted at the input of the power supply system together with varistors and at the connection points to telecommunication lines. They have become equally indispensable for protecting base stations in mobile telephone systems as well as extensive cable television (CATV) networks with their repeaters and distribution systems.


These protective components are also indispensable in other sectors, In AC power transmission systems, they are often used with current-limiting varistors, In customer premises equipment such as DSL modems, WLAN routers, TV sets and cable modems In air-conditioning equipment, the integral black-box concept offers graduated protection by combining arresters with varistors, PTC, diodes and inductor.

#### **Agency Approvals**


- ♦ Non-Radioactive
- ♦ RoHS compliant
- ♦ Low insertion loss
- Excellent response to fast rising transients
- ♦ Ultra low capacitance
- 5KA surge capability tested with 8/20µs pulse as defined by IEC 61000-4-5

#### **Applications**

- Communication equipment
- CATV equipment
- Test equipment
- Data lines
- Power supplies
- Telecom SLIC protection
- Broadband equipment
- ADSL equipment, including ADSL2+
- ♦ XDSL equipment
- Satellite and CATV equipment
- Consumer electronics

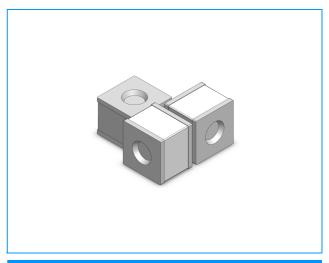

#### **Schematic Symbol**

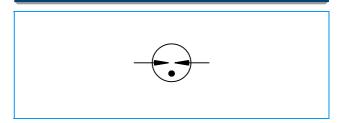



#### **Product Characteristics**

Materials	Dull Tin-plated
Product Marking	Without
Glow to Arc Transition Current	< 0.5 Amps
Glow Voltage	~60 Volts
Storage and Operational Temperature	-40 to +90°C
Weight	~0.5g



### **Device Dimensions** (Unit: mm)

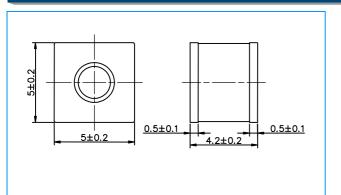

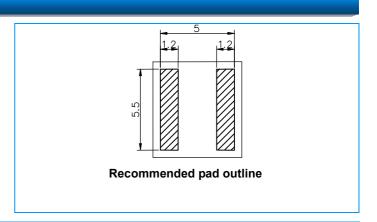

### **Electrical Characteristics**

		Maximum					Service Life			
Part Number	DC Spark-over Voltage	Imp Spark	ulse	Minimum Insulation Resistance	Maximum Capacitance	Arc Voltage	Nominal Impulse Discharge Current	Max Impulse Discharge Current	Nominal Alternating Discharge Current	Impulse Life
	@100V/S	@100V/ s	@1KV/ s		@1MHz	@1A	@8/20 s ! 5 times	@8/20 s 1 time	@50Hz 1 Sec 10 times	@10/1000 s 300 times
SMD5050-075	75V±20%	500V	650V	1 G Ω (at 50V DC)	1.0pF	~15V	5KA	10KA	5A	100A
SMD5050-090	90V±20%	500V	650V	1 G Ω (at 50V DC)	1.0pF	~15V	5KA	10KA	5A	100A
SMD5050-150	150V±20%	500V	650V	1 G Ω (at 50V DC)	1.0pF	~20V	5KA	10KA	5A	100A
SMD5050-200	200V±20%	500V	650V	1 G Ω (at 100V DC)	1.0pF	~20V	5KA	10KA	5A	100A
SMD5050-230	230V±20%	600V	700V	1 G Ω (at 100V DC)	1.0pF	~20V	5KA	10KA	5A	100A
SMD5050-300	300V±20%	700V	800V	1 G Ω (at 100V DC)	1.0pF	~20V	5KA	10KA	5A	100A
SMD5050-350	350V±20%	700V	800V	1 G Ω (at 100V DC)	1.0pF	~20V	5KA	10KA	5A	100A
SMD5050-400	400V±20%	800V	950V	1 G Ω (at 100V DC)	1.0pF	~20V	5KA	10KA	5A	100A
SMD5050-470	470V±20%	900V	1000V	1 G Ω (at 100V DC)	1.0pF	~20V	5KA	10KA	5A	100A
SMD5050-600	600V±20%	1100V	1200V	1 G Ω (at 100V DC)	1.0pF	~20V	5KA	10KA	5A	100A
SMD5050-800	800V±20%	1200V	1400V	1 G Ω (at 100V DC)	1.0pF	~20V	5KA	10KA	5A	100A
SMD5050-1000	1000V±20%	1500V	1600V	1 G Ω (at 100V DC)	1.0pF	~20V	5KA	10KA	5A	100A

#### Notes:

- 1. Terms in accordance with ITU-T K.12 and GB/T 9043-2008
- 2. At delivery AQL 0.65 level , DIN ISO 2859


Rev: 01.06.2015 2/4 www.leiditech.com



## **Electrical Rating**

Item	Test Condition / Description	Requirement	
DC Spark-over Voltage Impulse Spark-over Voltage	The voltage is measured with a slowly rate of rise dv / dt=100V/s  The maximum impulse spark-over voltage is measured with a rise time of dv / dt=100V//µs or 1KV/µs		
Insulation Resistance	The resistance of gas tube shall be measured each terminal each other terminal, please see above spec.		
Capacitance	The capacitance of gas tube shall be measured each terminal to each other terminal.  Test frequency:1MHz		
Nominal Impulse Discharge Current  Nominal Alternating	The maximum current applying a waveform of 8/20µs that can be applied across the terminals of the gas tube. One hour after the test is completed, re-testing of the DC spark-over voltage does not exceed ±30% of the nominal DC spark-over voltage. Dwell time between pulses is 3 minutes.  Crest value  100 90 20 µsec  Impulse Width  Rated RMS value of AC current at 50Hz, 1 sec. 10 times. Intervals: 3min. The DC spark-over voltage does not exceed ±30% of the nominal DC spark-over voltage.	To meet the specified value	
Nominal Alternating Discharge Current	Rated RMS value of AC current at 50Hz, 1 sec. 10 times. Intervals: 3min. The DC spark-over voltage does not exceed ±30% of the nominal DC spark-over voltage. IR > 10 <sup>8</sup> ohms.		


### Recommended soldering profile

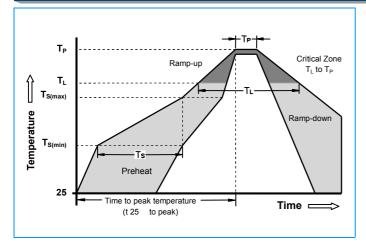


Reflow Condition		Pb - Free assembly	
	-Temperature Min (T <sub>s(min)</sub> )	150°C	
Pre Heat	-Temperature Max (T <sub>s(max)</sub> )	200°C	
	- Time (min to max) (t <sub>s</sub> )	60 -180 Seconds	
Average ramp up rate ( Liquidus Temp $T_L$ ) to peak		3°C/second max	
T <sub>S(max)</sub> to Ti	L - Ramp-up Rate	5°C/second max	
Reflow	- Temperature (T <sub>L</sub> ) (Liquidus)	217°C	
	- Time (min to max) (t <sub>s</sub> )	60 -150 Seconds	
Peak Temp	perature (T <sub>P</sub> )	260 +0/-5°C	
Time within 5"C of actual peak Temperature (t <sub>p</sub> )		10 - 30 Seconds	
Ramp-dow	n Rate	6°C/second max	
Time 25"C to peak Temperature (T <sub>P</sub> )		8 minutes Max	
Do not exceed		260°C	



## Tape and Reel Dimensions Unit: mm

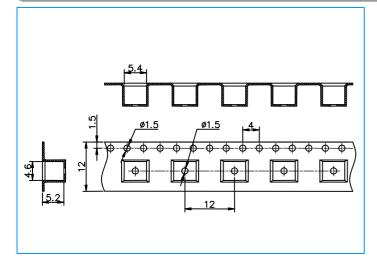

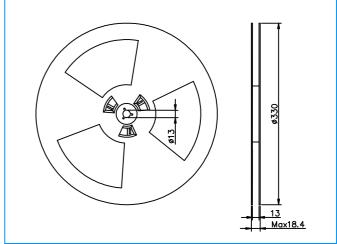

### **Packaging**

Part Number	Packaging Option	Quantity
SMD0505-XXX	Tape & Reel -12mm tape/13"Reel	1000

#### **Cautions and warnings**

- ◆ Gas discharge tubes (GDT) must not be operated directly in power supply networks.
- Gas discharge tubes (GDT) may become hot in case of longer periods of current stress (danger of burning).
- Gas discharge tubes (GDT) may be used only within their specified values. In the event of overload, the head contacts may
  fail or the component may be destroyed.
- ◆ Damaged Gas discharge tubes (GDT) must not be re-used.

Shanghai Leiditech Electronic Co.,Ltd

Email: sale1@leiditech.com Tel: +86- 021 50828806 Fax: +86- 021 50477059